





Front View

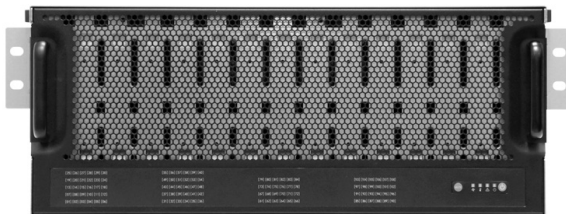

Features

- Intelligent Enclosure Management
- Individual drive power management
- Hot swap design for easy maintenance and management
- Enclosure Cable Management Kit
- Tool-less drive trays

Rear View

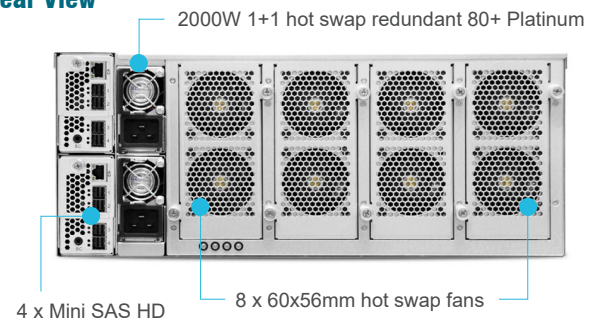

Specifications

General	Number of Expander	Single/Dual
	Expander Chip	Broadcom SAS35X48
	Host/Expansion Interface	4 x Mini SAS HD (SFF-8644) per expander module
Drives Supported	Drive Interface	<ul style="list-style-type: none"> • 12Gb & 6Gb SAS if using dual expanders • 12Gb & 6Gb SAS/SATA if using single expander
	Form Factor	3.5"
Administration / Management	Admin/Firmware Upgrade	<ul style="list-style-type: none"> • In-band • IEM port
	LED Indicators, Audible Alarm	Yes
Hot swap and Redundancy	Drive Bays	108
	Cooling	<ul style="list-style-type: none"> • 8 x 60x56mm hot swap fans • 1 x 40x56mm fan per expander module
	Power Supply	2000W 1+1 hot swap redundant 80+ Platinum <ul style="list-style-type: none"> • Socket type: C20 (Power code type: C19)
	Power Entry	Dual AC Inlet
	Expander Modules	Dual SAS topology (Optional)

Electrical and Environmental	AC Input	200~240V,50/60Hz,15A
	Operating Environment	<ul style="list-style-type: none"> • Temperature : 0°C to 35°C • Relative humidity : 20% to 80%
	Non-operating Environment	<ul style="list-style-type: none"> • Temperature : -20°C to 60°C • Relative humidity : 10% to 90%
Physical Specification	Dimensions (W x D x H)	mm : 434 x 1050 x 176 434 x 1273 x 176 (with CMA)
		inches : 17 x 41 x 7 17 x 50 x 7 (with CMA)
	Gross Weight (w/ PSU, Rail and Pallet; w/o Disks)	kgs : 66.97
		lbs : 147.6
Mounting	Packaging Dimensions (W x D x H)	mm : 640 x 1380 x 526 inches : 25.2 x 54.3 x 20.7
	Standard	41" fixed rail
	Option	Cable Management Kit

Ordering Information

SKU Number	Description
XJ1-41081-01	4U 108x 3.5" hot-swap bays, hot-swap JBOD with single SAS 12G expander controller, single BMC, tool-less HDD tray, 2000W 1+1 hot-swap redundant 80+ platinum, tool-less rail kit
XJ1-41081-02	4U 108x 3.5" hot-swap bays, hot-swap JBOD with dual SAS 12G expander controller, dual BMC, tool-less HDD tray, 2000W 1+1 hot-swap redundant 80+ platinum, tool-less rail kit